


EVERSAN

MODEL 9003

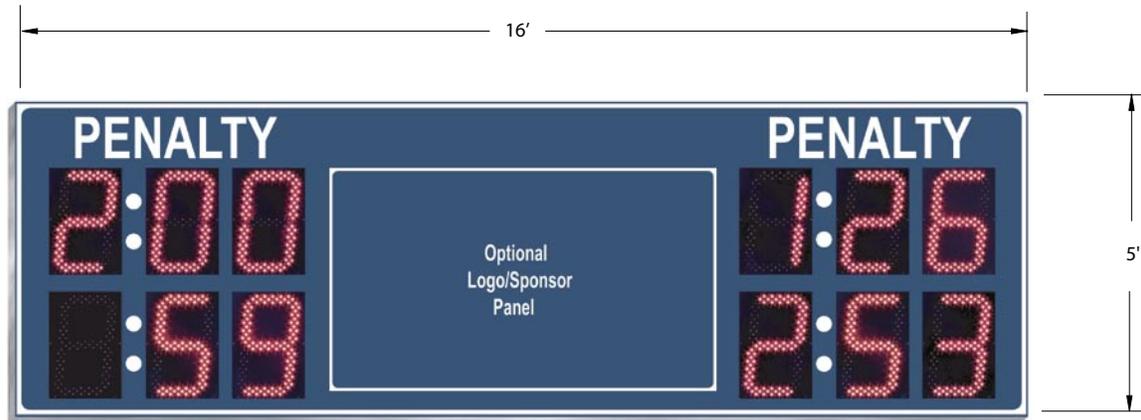

Player Penalty Display

This player penalty scoreboard displays PENALTY time to 9:59, for two teams. The scoreboard will operate as a standalone unit or can be added to any 16' football or soccer scoreboard to score lacrosse or field hockey. Scoreboard comes with an area for an optional logo/ sponsor.

SCOREBOARD SPECIFICATIONS

DIMENSIONS: Height 5'0", Width 16'0", Depth 6" (1524mm, 4877mm, 152mm). Weight 300 lb (136 kg)

POWER REQUIREMENT: 120VAC @ 4Amp, Max Power 480 W. 240VAC power available.

CONSTRUCTION: Aluminum alloy 5052, conforms to Federal specification QQ-A-250/8.

DIGITS & INDICATORS: The nominal digit size of all numbers is 18" (457mm) high.
All digits are 7-segment Ultra bright outdoor LED. Digits and
can be dimmed for night viewing. Digit colors are red or amber.

CAPTIONS: All captions are 8" (203mm) high. Stripe is 1" (25mm) in width. Captions and stripe
are white vinyl, applied directly to the face. Other caption colors are
available upon request. Optional sponsor area 66" (1676mm) long by 45" (1143mm)
high.

CABINET FINISH: All cabinets are finished with the highest UV protected powder coat in the industry
to ensure minimal fading for the life of the scoreboard.

OPERATING TEMPERATURES: -22 to 122 degrees Fahrenheit (-30 to 50 degrees Celsius). Console:
32 to 122 degrees Fahrenheit (0 to 50 degrees Celsius).



9003 PRODUCT SPECIFICATIONS (CONTINUED)

9003 CONTROL CONSOLE:

Control console is housed in a durable stainless steel case. Console has a 40-character liquid crystal display to recall and verify information being displayed on the scoreboard. The control console may be operated on 120VAC or an optional 12VDC battery. The standard power cord included with the control console is 6 feet long. Maximum power demand is 4 watts.

CONTROL CABLE:

One-pair shielded twisted cable of 22AWG is required for communication from the control console to the scoreboard (cabled scoreboards only).

SERVICE ACCESS:

All LED modules and electronics are serviced from the front of the scoreboard.

MOUNTING:

The scoreboard is typically mounted on two vertical beams, minimum size of W10 x 15, 10' apart on center. Beams are not supplied by Eversan, Inc. Eversan, Inc. supplies four Z-brackets to mount the scoreboard to the beams.

GENERAL INFORMATION:

Scoreboard is capable of providing penalty information for two teams. 100% solid state electronics housed in an all aluminum cabinet. Scoreboard ships in one section and includes hardware to assemble and mount on two beams. Mounting brackets are supplied. Specifications and pricing are subject to change without notice.

WARRANTY:

Eversan, Inc. warranty scoreboard and control console for five years. Warranty includes cost of labor and parts when returned prepaid to Eversan, Inc. Eversan, Inc. will not pay for repairs made by anyone other than authorized factory personnel. Switches, connectors or cables are not covered under warranty.

OPTIONS (call for quotes):

1. 2.4GHz spread spectrum radio control.
2. Logo/ sponsor panels.
3. Durable carrying case for control console.
4. 12V rechargeable battery for control console operation.
5. Protective netting.