




MODEL 9386-8

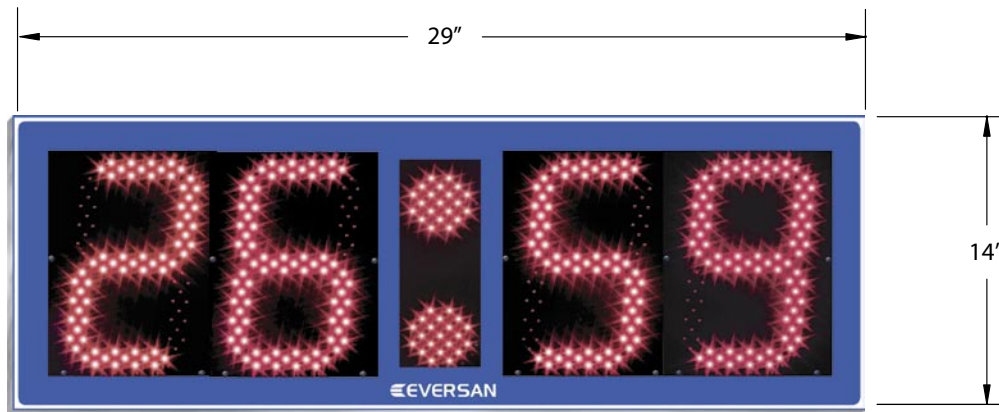

MultiPurpose Timer

This multipurpose L.E.D. timer has multiple functions that may be used in unison or separately. The modes of operation are Up-Count Timer, Down-Count Timer, Cycle Timer, and 12-Hour Clock.

SCOREBOARD SPECIFICATIONS

DIMENSIONS: Height 14", Width 29", Depth 5.5" (356mm, 736mm, 140mm). Weight 25lb (11 kg).

POWER REQUIREMENTS: 120VAC @ 2.14Amp, Max Power 250 W. 240VAC power available.

CONSTRUCTION: Aluminum alloy 5052, conforms to Federal specification QQ-A-250/8.

DIGIT SIZE: Nominal size of 8" (203mm) high. All digits are 7-segment Ultra bright outdoor LED. Digit colors are red or amber. Blue and green LED available.

CABINET FINISH: All cabinets are finished with the highest UV protected powder coat in the industry to ensure minimal fading for the life of the scoreboard.

OPERATING TEMPERATURES: -22 to 122 degrees Fahrenheit (-30 to 50 degrees Celsius).

SERVICE ACCESS: All LED modules and electronics are serviced from the front of the clock.

CONTROL CABLE: Three conductor shielded cable of 22AWG is required for communication from the control console to the scoreboard (cabled scoreboards only).

MOUNTING: The clock is typically mounted to an existing structure using four brackets supplied by Eversan, Inc.



9386-8 PRODUCT SPECIFICATIONS (CONTINUED)

9386-8 CONTROL CONSOLE:

Control console is housed in a durable plastic case. Console has two pushbuttons to set time being displayed on the clock. No power is required at the console and the standard length supplied is 6ft. Optional junction box and additional cable length available upon request.

GENERAL INFORMATION:

Clock is capable of time of day and temperature. 100% solid state electronics housed in an all aluminum cabinet. Clock comes complete and ready to install. Four mounting brackets are supplied. Specifications and pricing are subject to change without notice.

WARRANTY:

Eversan, Inc. warranty clock for five years. Warranty includes cost of labor and parts when returned prepaid to Eversan, Inc. Eversan, Inc. will not pay for repairs made by anyone other than authorized factory personnel. Switches, connectors or cables are not covered under warranty.

OPTIONS (call for quotes):

1. 2.4GHz spread spectrum radio control.
2. Internal battery back-up in case of loss of power.